

IORELLA VERDE LIGHT

CARE & MOUNTING INSTRUCTIONS

GENERAL NOTES:

THIS LUMINAIRE IS INTENDED FOR INDOOR USE ONLY.

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN. WHEN INSTALLING, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES AND ORDINANCES AND TO THE NATIONAL ELECTRICAL CODE (NEC).

FOR YOUR SAFETY AND THE PROPER OPERATION OF THE LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE INSTALLING.


TURN OFF THE ELECTRICITY AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. SWITCHING OFF THE POWER AT THE WALL SWITCH ALONE MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK. TO REDUCE THE RISK OF FIRE, ELECTRICAL SHOCK, OR PERSONAL INJURY, CONFIRM THE POWER IS OFF BEFORE YOU BEGIN.

THIS PRODUCT IS RATED FOR A MAXIMUM OF ONE (1) G25 BULB, 40W MAXIMUM. ONE 6W G25 BULB IS INCLUDED WITH YOUR PURCHASE. TO AVOID THE RISK OF FIRE, DO NOT EXCEED THE RATED WATTAGE.

THIS PRODUCT MUST BE MOUNTED TO A STANDARD UL LISTED JUNCTION BOX (J-BOX) RATED TO SUPPORT AT LEAST 50 LBS. THE FIXTURE ITSELF WEIGHS APPROXIMATELY 7 LBS.

FOR SAFETY AND EASE OF INSTALLATION, IT IS RECOMMENDED THAT TWO PEOPLE INSTALL THIS FIXTURE

CAREFULLY UNPACK THE LUMINAIRE, AND REVIEW THE CARE INSTRUCTIONS AT THE END OF THIS DOCUMENT FOR THE PROPER CARE OF YOUR FIXTURE.



FIGURELLA VERDE LIGHT


CARE & MOUNTING INSTRUCTIONS

CARE FOR YOUR FIXTURE:

THIS FIXTURE IS MADE OF SOLID BRASS WITH A NATURAL VERDIGRIS PATINA. THE PATINA IS A LIVING FINISH — IT WILL CONTINUE TO AGE, DEEPEN, AND SHIFT OVER TIME, AND THAT EVOLUTION IS PART OF THE FIXTURE'S CHARACTER.

TO CLEAN, SIMPLY DUST WITH A SOFT, DRY CLOTH, OR DUSTER.

AVOID HARSH CHEMICALS, POLISHES, AND ABRASIVE CLEANERS OF ANY KIND. THESE WILL DAMAGE OR PERMANENTLY ALTER THE PATINA AND FINISH.




FIGURELLA VERDE LIGHT


CARE & MOUNTING INSTRUCTIONS

COMPONENTS PROVIDED FOR INSTALLATION:


FIGURELLA VERDE LIGHT (FULLY ASSEMBLED)

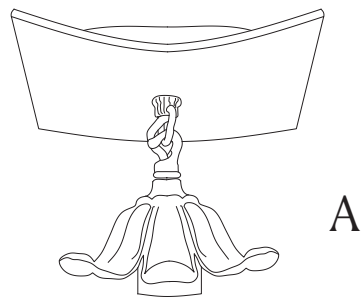


MOUNTING BRACKET and (2) SCREWS

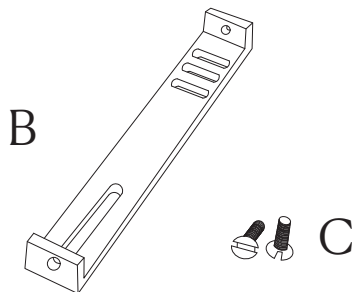


WIRE NUTS




LIGHT BULB



NITRILE GLOVES

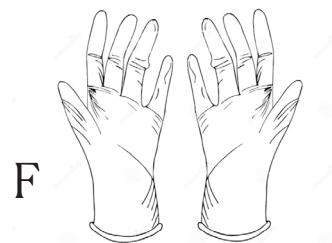




FIORELLA VERDE LIGHT

CARE & MOUNTING INSTRUCTIONS

1. Turn off all power to the fixture's circuit at the main fuse box or breaker panel. Confirm the power is off before continuing.
2. Unpack your fixture from the packaging, Nitrile gloves are included in your package. We recommend wearing them whenever handling the fixture — oils from bare hands can transfer to the brass and affect the patina.
3. Attach the mounting bracket to the J-box using the #8-32 screws supplied with a standard J-box. Note: The fixture canopy will sit square to the orientation of the mounting bracket, so position the bracket accordingly.
4. Ground the fixture. This fixture is not supplied with its own ground wire; it grounds through metal-to-metal contact with the solid brass mounting bracket.

Metal J-box: Verify the branch-circuit ground wire is properly grounded to the J-box.

Plastic (non-metallic) J-box: Connect the branch-circuit ground wire directly to the Mounting Bracket (B) using a grounding screw.



FIORELLA VERDE LIGHT

CARE & MOUNTING INSTRUCTIONS

5. Attach the mounting bracket to the J-box using #8/32 screws that come supplied with a standard J-box. Note: The fixture will sit square to the orientation of the mounting bracket, so position the bracket accordingly.
6. Make the electrical connection. With a second person supporting the weight of the fixture, connect the fixture wires to the ceiling wires — white to white, black to black. Secure each connection with the supplied wire nuts.
7. Attach the canopy. Slip the canopy over the mounting bracket and secure it with the mounting screws, tightening from either side of the fixture.
8. Install the included G25 bulb, turn the power back on at the fuse box, and confirm the fixture operates.